




KRØLL CRANES



F.E.M 1.001-A3/E3

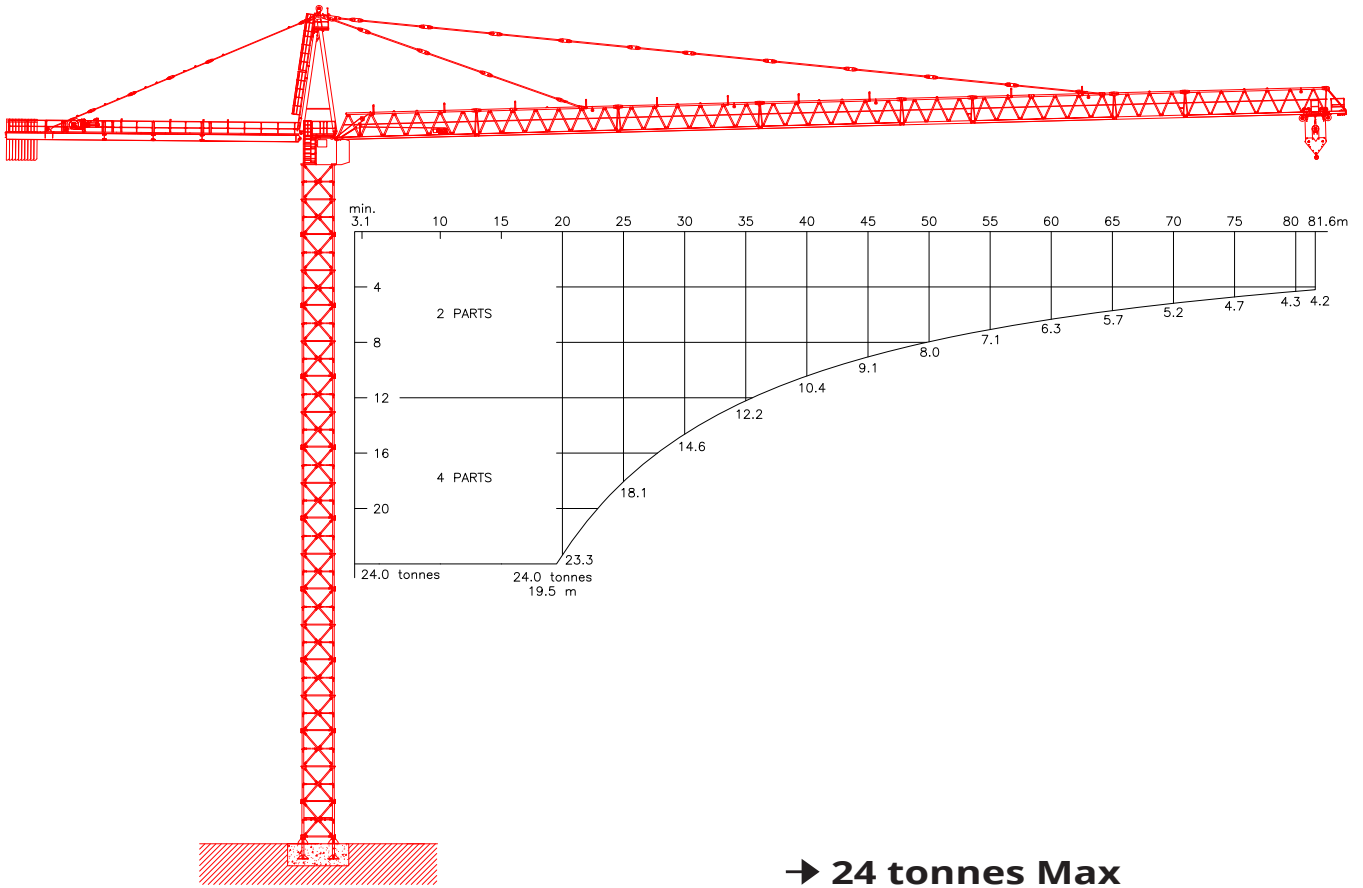


**HIGH TOP
TOWER CRANE**















K560

24 tonnes Max

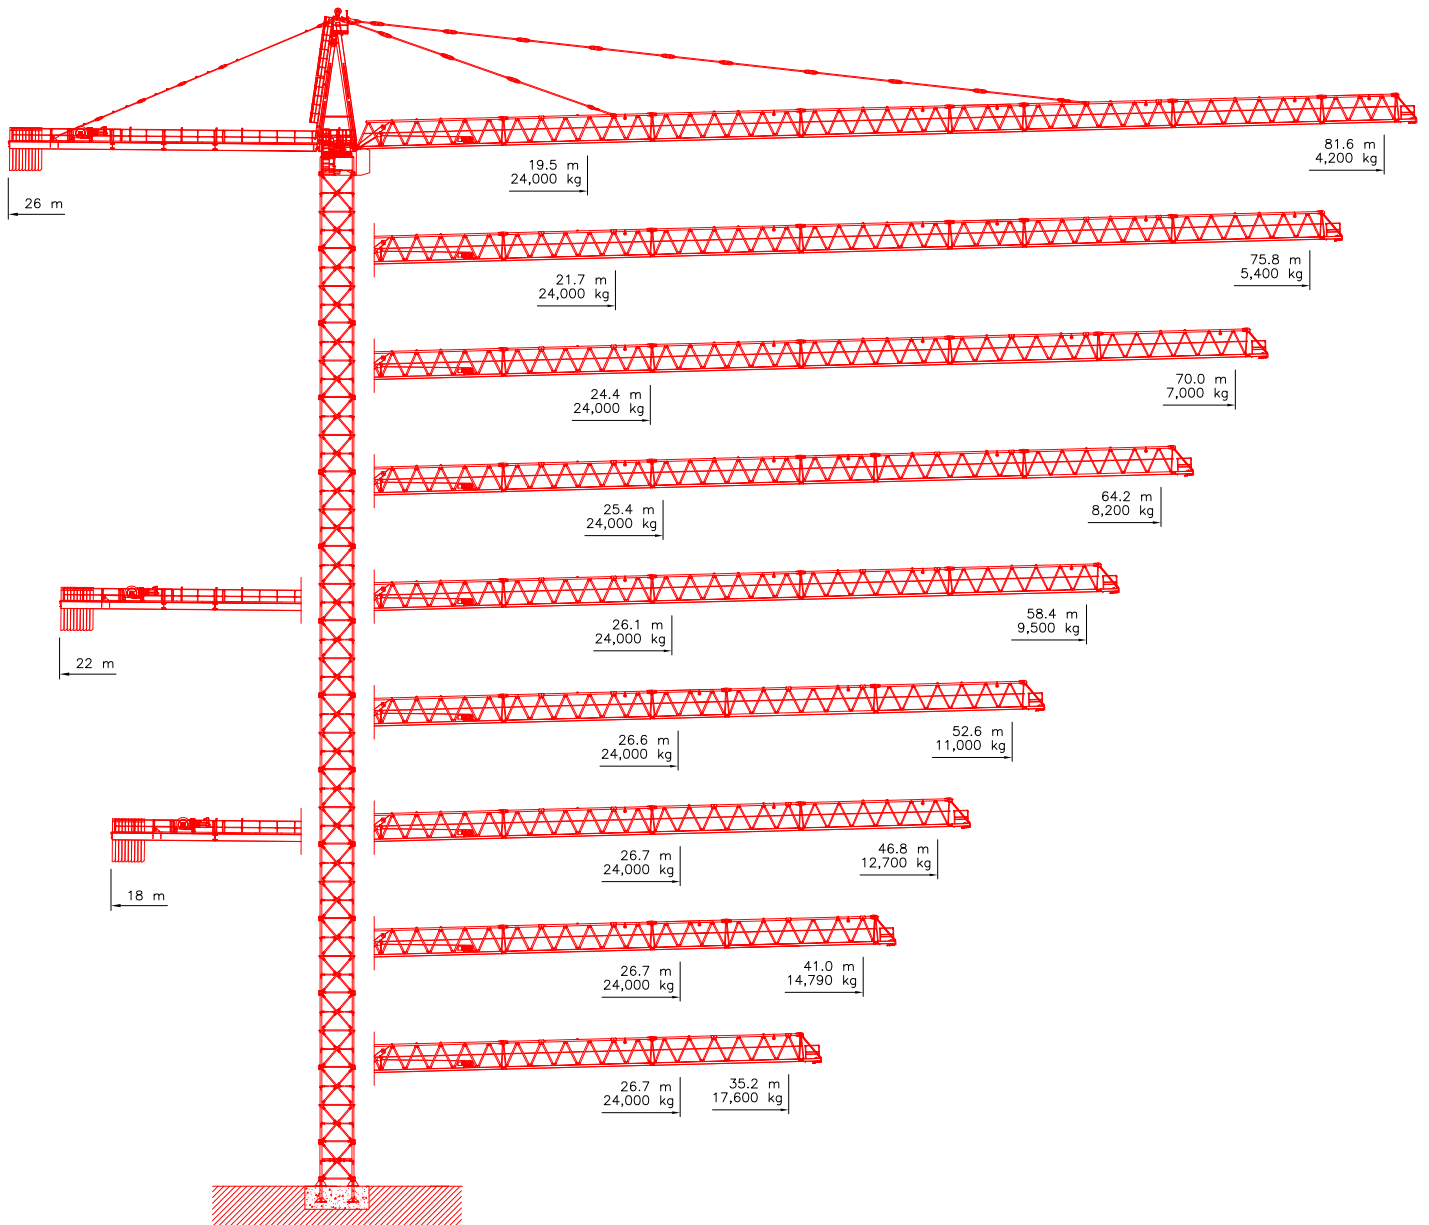Courtesy of Crane.Market

JIB CONFIGURATIONS



HOIST WINCH MOTOR 85 kW	2-PARTS		4-PARTS		
					
	Load	Max. Speed	Load	Max. Speed	
	0 - 1.2 t 1.2 - 5.0 t 5.0 - 12.0 t	136 m/min 74 m/min 34 m/min	0 - 2.4 t 2.4 - 10.0 t 10.0 - 24.0 t	68 m/min 37 m/min 17 m/min	
	HOIST DRUM		HOIST WIRE		
	CAPACITY 550 m / 6 Layers			Diameter	20 mm
		Safety Factor		5	
		MBL		330 kN	
	TROLLEY WINCH			TROLLEY DRUM	
	MOTOR 16 kW			CAPACITY 75 m / 1 Layer	
TROLLEY SPEEDS			TROLLEY WIRE		
	0 - 24 t	0 - 70 m/min	Diameter	10 mm	
			Safety Factor	6	
			MBL	87 kN	
	SLEW DRIVE			POWER	
	Motor 3 x 10 kW			SUPPLY 400 - 480 V, 50/60 Hz	
SLEW SPEEDS			Consumption	150 kVA	
	0 - 24 t	0 - 0.6 rpm	Main Fuse	160 A	
			Recommended Generator Size	350 kVA	
	UNDERCARRIAGE			SUPPLY CABLE	
	Motor 4 x 7 kW				
TRAVEL SPEEDS			Cable Length	Cable Type	
	0 - 24 t	0 - 25 m/min	0 - 175 m	4 x 70 mm ²	
			175 - 250 m	4 x 95 mm ²	
<p>All motion controls are completely stepless ensuring smooth and jerk-free operation. Creeping speed down to 0.5% of maximum speed.</p>			<p>All specifications shown in the tables are for the standard version of K560. For special requirements regarding load charts or drive speeds, please contact Krøll Cranes A/S.</p>		

F.E.M 1.001-A3/E3


EN 14439:2009-C25



All data is subject to alteration.



KRØLL CRANES

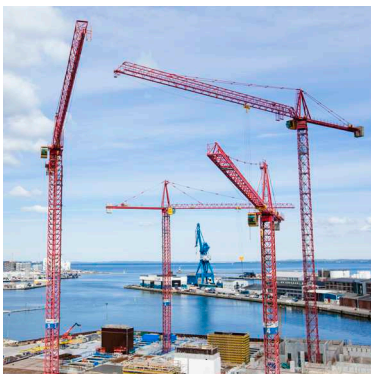

KRØLL CRANES A/S
Nordkranvej 2
DK-3540 Lyngø
Denmark

Tel: +45 48 18 74 00
Mail: info@krollcranes.dk
Web: www.krollcranes.dk



**FAELLE
FAVCO**

THE MUHIBBAH GROUP 